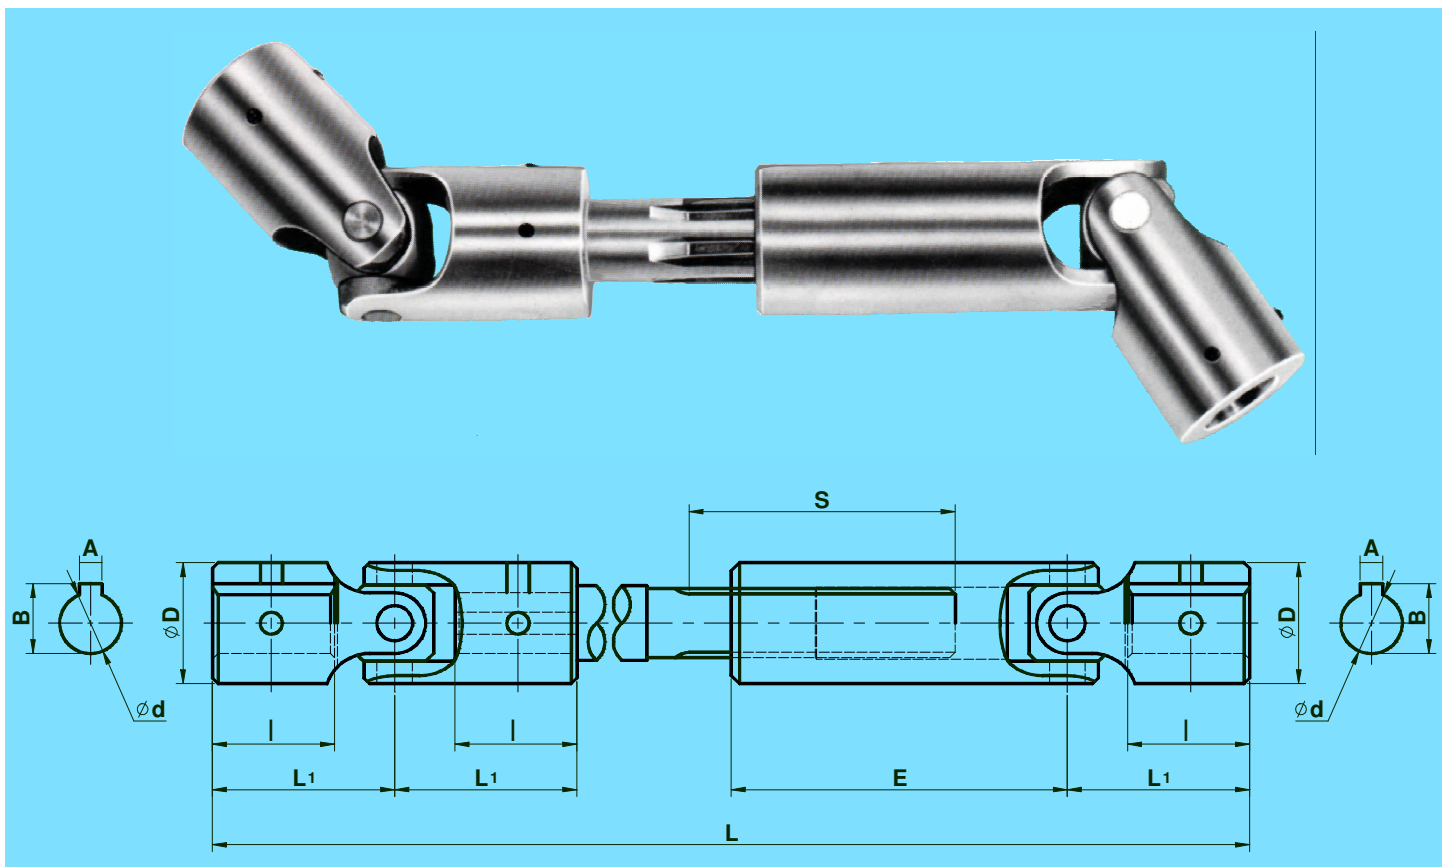


LI CHUAN

UNIVERSAL
JOINTLS
TYPE

記號 形式	容許扭力 (kg/m)	破壞扭力 (kg/m)	引張破壞 荷重(kg)	最短全長 L MIN MAX	伸縮量 mm	內 徑 φ d H7	外 徑 φ D	Yoke 長 L1	輸入長 l	套筒長 E	鍵 A×B	齒軸長 S	伸縮軸尺寸 外徑內徑模數齒數
LS- 10	3.0	75	1,800	167 360	+30	10	20	34	24.5	65	4× 11.8	55	M1.0×PA20°×NT8
LS- 12	4.5	120	3,200	206 400	+30	12	24	42	30.5	80	4× 13.8	68	14×11×3.0×6
LS- 14	7.0	170	3,700	231 460	+40	14	28	47	33.5	90	5× 16.3	76	16×13×3.5×6
LS- 16	10.0	250	5,300	256 500	+40	16	32	52	36.5	100	5× 18.3	84	20×16×4.0×6
LS- 18	130	320	6,200	290 580	+40	18	36	60	42.5	110	6× 20.8	92	20×16×4.0×6
LS- 20	180	450	7,100	301 600	+50	20	40	62	42.5	115	6× 22.8	95	22×18×5.0×6
LS- 22	240	600	9,400	315 640	+50	22	44	65	43.5	120	8× 25.3	98	25×21×6.0×6
LS- 25	300	800	11,250	335 700	+50	25	50	70	44.5	125	8× 28.3	100	28×23×6.0×6
LS- 30	450	1150	14,300	422 810	+60	30	60	89	61.0	155	8× 33.3	127	34×28×7.0×6
LS- 35	550	1800	18,500	475 1,000	+60	35	70	100	66.5	175	10× 38.3	141	34×28×7.0×6
LS- 40	850	2500	24,000	532 1,140	+70	40	80	114	76.5	190	12× 43.3	152	M2.5×PA20°×NT16
LS- 45	1250	3500	29,500	575 1,260	+70	45	90	125	73.5	200	14× 48.8	148	M2.5×PA20°×NT16
LS- 50	1800	4900	38,000	615 1,340	+90	50	100	135	80.0	210	14× 53.8	155	M3.0×PA20°×NT16
LS- 60	2800	6500	57,500	680 1,460	+90	60	120	150	85.0	230	18× 64.4	165	M4.0×PA20°×NT16
LS- 70	4500	1,2000	71,000	730 1,800	+110	70	135	160	92.0	250	20× 74.9	182	M4.0×PA20°×NT16
LS- 80	5500	1,4000	82,000	820 2,000	+130	80	160	180	110.0	280	22× 85.4	210	M5.0×PA20°×NT16
LS-100	6500	1,9000	97,000	1,060 2,400	+130	100	175	250	135.0	310	28×106.4	195	M5.0×PA20°×NT16